

MANUALLY OPERATED

Ideal for control of pests & disease on all field crops and small orchards

ASPEE LEADER


CODE : AP51

Technical Description

Code	AP51
Normal working pressure	40 PSI 2.6 bar
L x W x H (in mm)	774 x 235 x 105
Weight (kg without discharge line(approx))	2.513

Features

- Easy operation with light strokes
- Spray lance consists of trigger cut-off valve, extension rod, 60 cm. long one end bent as gooseneck, fine mist spray nozzle
- Adjustable stirrup

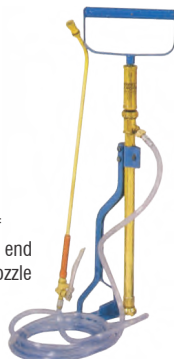

ASPEE STANDARD

CODE : AP44

Technical Description

Code	AP44
Normal working pressure	40 PSI 2.6 bar
L x W x H (in mm)	670 x 232 x 105
Weight (kg without discharge line(approx))	2.250

Features

- Easy operation with light strokes
- Spray lance consists of trigger cut-off valve, extension rod, 60 cm. long one end bent as gooseneck, fine mist spray nozzle
- Adjustable stirrup



ASPEE UTILITY

CODE : UTS002/TCGX

Technical Description

Code	UTS002/TCGX
Normal working pressure	40 PSI 2.6 bar
L x W x H (in mm)	670 x 232 x 105
Weight (kg without discharge line(approx))	2.250

Features

- Easy operation with light strokes
- Spray lance consists of trigger cut-off valve, extension rod, 60 cm. long one end bent as gooseneck, fine mist spray nozzle
- Adjustable stirrup



ASPEE GROUP OF COMPANIES