


ASPEE TRACTAMOUNT BOOM SPRAYER



**CODE : HTT/40
HTT/50**

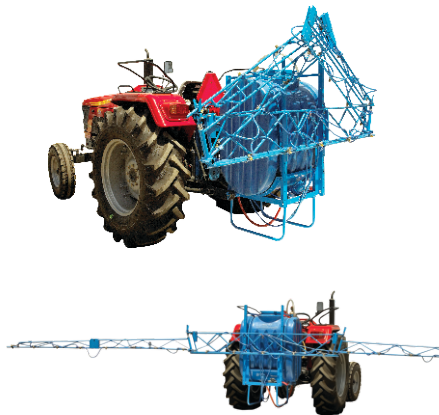

Designed for economic and effective application of pesticides, weedicides and fertilizers in farm crops with ground spray boom

Special Features:

- All controls within easy reach from driver's seat
- Pressure regulator on control panel for pre-setting spraying pressure
- 400 lit. capacity tank made from rotomould plastic
- Hydraulic agitator within tank
- Auto-filling & suck- back device
- Available for spraying on field crop with 2 type of ground spray boom, 40 fit. long boom with 25 nozzles and 50 fit. long boom with 31 nozzles

ASPEE TRACTAMOUNT BOOM SPRAYER



**CODE : HTT/40
HTT/50**

ASPEE TRACTAMOUNT BOOM sprayer, suitable for driving with tractor PTO complete with 400 ltrs. capacity plastic tank, with bypass, agitator and suction hose assemblies, control panel, agitator valve, suckback and pressure regulator valve, pressure vessel, pressure gauge, adjustable link, HTP unit mounted on frame, propeller shaft for PTO, auto filling hose and ground spray boom 40 ft. long with swivel arms with 25 nozzles giving swath width of 12000 mm.

Technical specification		
Model	HTT/40/50	
Tank capacity	400 ltr	
Sprayer unit	ASPEE HTP power sprayer	
Working pressure	Ideally 100 psi	
Maximum pressure	ASPEE HTP unit 400 psi (28kg/cm ²)	
Rpm	PTO rpm 540	
Pump discharge rate	36 lpm @ 950 rpm	
Hp required	35 hp minimum	
Boom type	HTT40	HTT50
Boom length in ft	40	50
No. of nozzles	25	31
Spacing in inch	20	20
Swath	12.2 mtr / 40 ft	15.24 mtr / 50 ft
Total weight	160 kg (without boom assembly)	
L x W x H (in mm)	2250 x 1050 x 2250	



ASPEE GROUP OF COMPANIES

ASPEE House, P. O. Box No. 7602, B. J. Patel Road, Malad (W), Mumbai 400 064. India.
Tel.: 91-22 6774 5700. Fax: 91-22 2882 2336. Email: aspee@aspee.net. Website: www.aspee.com

Important Notes: Specifications Subject To Change Without Notice.

AN ISO 9001:2008 CERTIFIED COMPANY